	WASHIN	ERNATIONAL DEVELOPMENT .		Batch 51	LY
t. SURDECT	A, INHIBARY			TEMPORARY	
CLASSI- Liu, m TIÓN	B. SECONDARY				
building	summary to resist the	effect of wind, v.l: c	overview	,	•
. Authomisi Murshall	l,R.D.; Raufaste	,N.J.; Kliment,S.A.			
DOCUMENT	DATE	5. NUMBER OF PAGES	6. ARC NUMB	ER	
HEFFRENC 1133	C DYGANIZATIÖN NAME	AND ADDRESS			
. SUPPLEME (In NhS	NTAHÝ NOTES (Spankorin building scienc	g Organization, Publishers, Availa e sen.100)	odity)		
9 ARSTRACT			·	-	

(HOUSING R & D)

An overview (Vol. 1) of a five-volume series that describes the accomplishments of a research project conducted to develop improved design criteria for low-rise buildings to better resist extreme winds. This document presents the background, goals, procedures, and results of the project, which was begun in 1973 and conducted for three and one-half years. The rationale was that such research is needed to reduce loss of life and property, disruption of productive capacity, and costs of disaster relief. Project results include a methodology for estimating extreme wind speeds; development of wind tunnel modeling techniques; a heightened awareness of the wind problem and the need to guard against it; and documentation of information in the areas of design wind speeds and pressure coefficients, economic forecasting, socioeconomic and architectural concerns, and construction detailing practices. During the course of the project, a program was begun to train professionals and technicians in developing countries to carry out wind measurements and analyses. Methods to ensure transfer of information to user groups were employed. Volume 2 of the series presents a methodology to estimate design wind speeds and a guide to determining wind forces. Volume 3 presents a guide for improved use of masonry connectors and timber fasteners. Volume 4 furnishes a methodology to estimate and forecast housing needs on a regional level. Volume 5 presents socioeconomic and architectural considerations applicable to the Philippines, Jamaica, and Bangladesh.


in, control humber FN-AAU-208	,		11. PRICE OF DOCUMENT
12. DESCRIPTIONS			13, PROJECT NUMBER
		~	14. CONTRACT NUMBER PAGA TA(CF)=CH=72 Bos.
			IS, TYPE OF DOCUMENT



020926

699-83

M 3

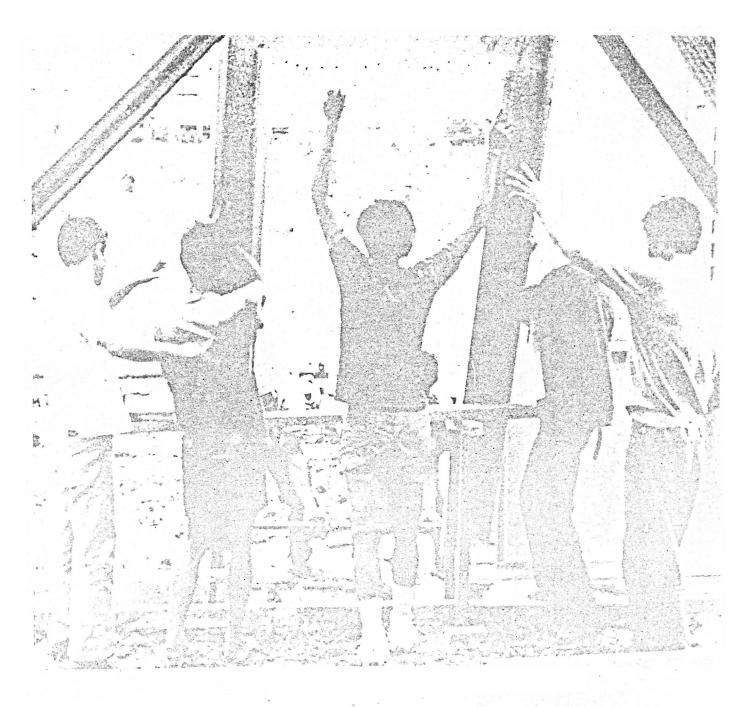

NBS BUILDING SCIENCE SERIES 100
Building To Resist The Effect Of Wind
VOLUME 1. Overview

U.S. DEPARTMENT OF COMMERCE • NAFIONAL BUREAU OF STANDARDS

### NBS BUILDING SCIENCE SERIES 100-1

# Building To Resist The Effect Of Wind

in five volumes

**VOLUME 1:** Overview

Richard D. Marshall and Noel J. Raufaste, Jr. Center for Building Technology Institute for Applied Technology National Burëau of Standards Washington, D.C. 20234

and

Stephen A. Kliment, Architect 663 Fifth Avenue New York, New York 10022

#### Sponsored by:

The Office of Science and Technology Agency for International Development Department of State Washington, D.C. 20523



U.S. DEPARTMENT OF COMMERCE, Juanita M. Kreps, Secretary

NATIONAL BUREAU OF STANDARDS, Ernest Ambler, Acting Director

Issued May 1977

Library of Congress Catalog Card Number: 77-600013

National Bureau of Standards Building Science Series 100-1 Nat. Bur. Stand. (U.S.), Bldg. Sci. Ser. 100-1, 34 pages (May 1977) CODEN: BSSNBV

## U.S. GOVERNMENT PRINTING OFFICE WASHINGTON: 1977

#### **PREFACE**

This Overview is Volume I of a five-volume series.! The series describes the activities and accomplishments of a research project undertaken by the National Bureau of Standards for the Agency for International Development to develop improved design criteria for low-rise build: gs to better resist extreme winds.

The purpose of the Overview is to provide the reader with a complete summary of this three and a half year project. It is presented for the benefit of the decision maker. The information in this volume is arranged in gradually increasing degrees of detail from an abstract, to an executive summary, to a detailed summary. Detailed technical information is presented in the four companion volumes noted below:

The first section, Introduction, contains three parts: goals and objectives of the project; background information (including selection of the three developing countries that participated in the project—the Philippines, Jamaica and Bangla-yesh); and a review of preparatory project activities. These activities included establishment of the Philippine Advisory Committee to coordinate local activities in that country, where the bulk of the wind measurement activities were performed.

Grouped under the heading Review of Project Activities, the reader will find a discussion of the two methods used to collect data during the course of this project. The first addresses the accomplishments of the wind measurement program through full-scale field tests and through wind-tunnel modeling. The second summarizes the process of collecting data through other means, including literature searches and workshops. This section also summarizes the contents of the four companion volumes. The essence of other related work carried out by individuals and institutions not connected with the NBS/AID project also is presented, Included are results of complementary studies performed by the Massachusetts Institute of Technology and the Carnegie-Mellon University.

The next section, Information Transfer, is devoted to a review of actions aimed at disseminating draft project findings to the users. Workshops, a 16-mm sound film and user-oriented materials are described.

I The titles of the other four volumes are Volume 2 Estimation of Extreme Wind Speeds and Guide to the Determination of Wind Force., Volume 3: A Guide for Improved Masonry and Timber Connections in Buildings: Volume 4: Forecasting the Economics of Housing Needs: A Methodological Guide; and Volume 5: Housing in Extreme Winds: Socio-economic and Architectural Considerations. The report concludes with two sections, Accomplishments and Needs and Recommendations.

The reader also will find appendices that provide supporting information. The first lists the participating organizations in the three participating countries and organizations from other countries who contributed to the outcome of the project. A second appendix references publications arranged under four categories: publications and articles developed during the course of the research; wind measurements and design loads; socio-economic factors and housing characteristics; and planning, design and construction technology.

#### **ABSTRACT**

This document presents the background, goals, procedures and results of a project to develop improved design criteria that can lead to low-rise buildings in developing countries that can better withstand the effects of extreme winds. The project stemmed from the belief that additional research on wind loads was needed to reduce loss of life and property, human suffering, disruption of productive capacity and costs of disaster relief. The three and a half year project began in early 1973. Results from the project include: a methodology for the estimation of extreme wind speeds; the development of wind tunnel modeling techniques; a heightened awareness of the wind problem and the need to guard against it; and the documentation of information in the areas of design wind speeds and pressure coefficients, economic forecasting, socio-economic and architectural concerns, and construction detailing practices. Also during the course of the project, a program began in the training of professionals and technicians in developing countries to carry out wind measurements and analyses. In addition, methods to ensure transfer of information to user groups were employed.

Project results ar: presented in five volumes, Volume 2 presents a methodology to estimate design wind speeds and a guide to the determination of wind forces. In Volume 3, a guide is presented for improved use of masonry connectors and timber fasteners. Volume 4 furnishes a methodology to estimate and forecast housing needs at a regional level. Socioeconomic and architectural considerations applicable to the Philippines, Jamaica and Bangladesh are presented in Volume 5.

Key words. Codes and standards, disaster mitigation; housing, low-rose buildings, socio-economics, structural connections, technology transfer, wind loads.

Cover. Laborers erect a prefabricated wood test house, donated by the National Housing Corporation (Philippines), Quezon City.

#### **CONTENTS**

EXECUTIVE SUMMARY	1
1. INTRODUCTION	5
1.1 Goals and Objectives 1.2 Background 1.3 Preparatory Activities	6
2. REVIEW OF PROJECT ACTIVITIES	y
2.1 Development of Information Through Measurement 2.1.1 Full-Scale Field Tests 2.1.2 Wind Tunnel Studies 2.2 Collection of Complementary Data 2.2.1 Literature Search 2.2.2 Workshop/Conferences 2.2.3 Summaries of Companion Volumes 2.2.4 Summaries of Other Related Reports.	9 10 13 13 13
3. INFORMATION TRANSFER	17
3.1 Regional Workshop/Conferences 3.2 Wind Reference Collection 3.3 16-mm Sound Movie	18
4. ACCOMPLISHMENTS OF THE NBS/AID HIGH WIND PROJECT	19
5. NEFDS AND RECOMMENDATIONS.	21
Appendix A. Participating Organizations	4-
Appendix B. References	B- :
Chronological Project Output References.  Wind Measurements and Design Loads  Socio-Economic Factors and Housing Characteristics  Planning, Design and Construction Technology	В В
Figures	
Fig. 1 Geographic Locations of Wind Prone Countries Participating in the Study.  Fig. 2 Field Test Sites  Fig. 3 Two Test Houses at Quezon City Site  Fig. 4 Photograph of Scale Model of Field Test House Installed in University of Philippines Wind Tunnel	8 11

#### **CONTRIBUTORS**

The Center for Building Technology's project team wishes to acknowledge in particular six persons among the very-many participants and contributors who all have made this project a success. They are:

Dr. Ernesto G. Tabujara, Professor of Civil Engineering at the University of Philippines and Chairman of the Philippine Advisory Committee (a committee of leading Philippine building professionals), who was responsible for coordinating the overall wind-research activities based in the Philippines.

Dr. Roman L. Kintanar, Administrator of the Philippine Atmospheric, Geophysical and Astronomical Services Administration, who was responsible for all field data collection activities on six full-scale buildings. A significant portion of the project's results is based on the full-scale field studies.

Stephen A. Kliment, Architectural Consultant in New York City, synthesized a great amount of material supplied by the Center for Building Technology, including the three NBS/CBT progress reports prepared for the Agency for International Development, into this general overview report, Volume 1, and authored Volume 5, Housing in Extreme Winds.

Dr. Jamilur R. Choudhury, Assistant Professor of Civil Injureering, Dacca University of Science and Technology. He represented Bangladesh and the Bay of Bengal countries in providing socien economic, structural, and chimatolic jural data to the project and in transferring project results to his goographic area.

Alfrico D. Adams, of Douet. Brown, Adams and Partners, Consulting Logineers, Jamaica. He too provided the project with climatological, codes and standards, structural and socio-economic information and disseming a despective ults to the wind-prone countries of the Construction.

William H. Littlewood, the project monitor from the Office of Science and Technology, Agency for International Development. He recognized the need for this research and provided valuable guidance and support during the course of the project.

Many others provided valuable technical, logistical, and administrative support without which the project could not have been completed. These contributors are listed in Appendix A.



#### **EXECUTIVE SUMMARY**

The effects of natural disasters are all-too well known. Cost-effective improvements in building designs (such as improved roof-to-wall connections; roof geometry and structural bracing) tailored to the climates of developing countries can greatly reduce loss of human life and property, disruption of development, and the cost of disaster relief in those countries.

This research project originated from a recognition of the need for additional research to supplement limited existing data regarding the effects of wind on low-rise buildings, especially in developing countires. This research and the resultant development of design criteria and methodologies will reduce loss of life and property damage in the countries where the criteria are properly applied. As a result of this project, the National Bureau of Standards (NBS) developed and transferred improved knowledge on the performance of buildings under extreme wind conditions, with a resulting benefits to communities world wide that are threatened by high winds.

The purpose of this Overview report is to ammunize the efforts of this project and to serve as a guide to the other volumes of this publication and related articles and reports published during the course of the project (see page B-1).

#### **BENEFITS**

The activities and results of the project have produced the following benefits:

- Improved wind load design criteria have been developed to guido members of the building community in developing countries.
- Vital training of professionals and technicians has begun in developing countries for carrying out wind measurement and analysis.
- By means of workshops and other forms of information transfer, there is a growing sensitivity of the design profession to the need for improved ways to guard against the effects of extreme winds, and methods to improve building practices.
- Technical information has been failured to the user's needs in developing countries
- Essential but scattered documentation on good building practices has been identified for use by the buildme community.
- Interaction between members of the building community representing government, industry, professional and academic organizations was stimulated by this project in all participating countries.

#### FIELD TESTS AND WIND TUNNEL STUDIES

Three field test sites in the Philippines were selected for recording wind load data on buildings. The wind tunnel at the National Hydraulic Research Center, University of the Philippines, was used to carry out a series of test on models of full-scale test buildings. These model studies were used in the planning of full-scale studies and the interpretation of test results. NBS project staff also arranged for a series of comprehensive wind tunnel tests to be carried out at the Virginia Polytechnic Institute and State University where a more accurate simulation of atmospheric surface flows was established. The results of these and other studies are discussed in detail in the NBS Interagency Report NBSIR 75-790, reference 8, page B-1.

#### ADDITIONAL PROJECT INVESTIGATIONS

To complement the information collected from full-scale tests and wind tunnel studies, NBS staff and consultants developed special information in key subject areas. This information is in the form of four companion volumes to this Overview. These companion volumes are further described in section 2 of this Overview.

Volume 2 consists of two reports. The first, Estimation of Extreme Wind Speeds—Application to the Philippines, reviews probabilistic techniques for the analysis of existing data and the selection of design wind speeds. It also states that design speeds currently used in the Philippines can be reduced in some areas but should be increased in others. The techniques may be used to perform similar analyses in other countries. Simplified procedures for the calculation of wind

pressures acting on building surfaces were developed. These procedures and associated design criteria provide building professionals with more reliable design loads. This information is presented in the second report, A Guide to the Determination of Wind Forces. The report describes the basics of wind flow around building; and the pressures created by these flows on building surfaces. The data can form the basis for wind load design standards in developing countries.

Volume 3 of this series, A Guide for Improved Masonry and Timber Connections in Buildings, presents recommendations for good construction practices and details, especially for countries experiencing extreme winds. The report serves as a reference for improving building practices.

The project also produced a method to allow a country's planners, economists, public officials, and other decision makers to assess housing needs for up to 20 years into the future. The method is described in Volume 4 of the series, Ferecasting the Economics of Housing Needs: A Methodological Guide.

Info hation on the cultural and socio-economic factor, that affect building practices was developed as Volume 5, Housing in Extreme Winds Socio-economic and Architectural Considerations. It shows how strong, inexpensive, locally available building materials can be integrated with good building design. The report is user-oriented and addresses the Philippines, Jamaica and bangladesh. Materials that are cheap, strong and locally available are recommended, and several innovative methods of construction are discussed.

#### **TECHNOLOGY TRANSFER**

Project results were discussed at two regional conferences; one in Manila, Philippines (May 1975) and the other in Kingston, Jamaica (November 1975). These conferences provided linkages for transferring project results to the building community composed of government agencies, private developers, design professionals, regulatory officials, as well as university staff from Asian and Caribbean wind-prone countries.

Summaries of the workshops are discussed later in this Overview and are described in further detail in NBS Interagency Reports 74-567 and 75-790 cited below. To stimulate the general public to improve their buildings to better resist extreme winds, user-oriented material has been developed which contains concise and graphic descriptions of technological issues, and research findings. One such item titled, 43 Rules: How Houses Can Better Resist 'ligh Winds, has been published as an NBS Interagency Report and could be translated and modified by the local AID

missions and/or appropriate in-country housing organizations to meet each country's unique requirements.

Another user-oriented product is an 18 minute, In mm movie summarizing the project and its results. Starting with the destructive effects of winds on buildings, it moves to the NBS field-testing activities, the wind tunnel-testing program and the project's outputs. Additional information about the movie may be found in section 3.3 of this volume.

#### OTHER PUBLICATIONS

Several important vehicles communicating the results of this project have been made available to the public. Chief among these is a series of three NBS Interagency Reports (NBSIR) which describe in detail the progress of the project through Fiscal Years 1973, 1974 and 1975. Each report includes not only a progress summary for that year but also the full texts of associated papers, reports, minutes of meetings and workshop agendas developed during the fiscal year. They are cited as references 1, 2 and 8, page B-1.

In addition to these discuments, the proceedings of a special 1973 workshop in Manula which identified the state-of-the-art of wind technology in developing countries was published as NBS Building Science Series 56, Development of Improved Design Criteria to Better Resist the Effects of Extreme Winds for Love-Rise Buildings in Developing Countries. This report is identified as reference 3, page B-1.

#### NEEDS AND RECOMMENDATIONS

Several recommendations evolved from the project. They include the need for comprehensive post-disaster surveys and prompt reporting of findings, further improvement of transfer of user-oriented information to local craftsmen; incorporation of project test results in the codes and standards of developing countries; and recognition by US standards-generating committees of the findings of this project as they consider the development of new or revised standards for wind loading.



#### 1. INTRODUCTION

The US Agency for International Development (AID) and the National Bureau of Standards (NBS) recognized a need for design criteria that would improve the ability of low-rise buildings in developing countries to withstand the effects of extreme winds. By 1976, over three years after it legan, the project that grew out of this recognition drew to a close. Among its accomplishments eyere the development of improved design criteria for wind loading; a methodology for the estimation of extreme wind speeds; a greater awareness of the urgent need for better ways to guard against the ravages of extreme

winds; the productive interaction between members of the building community in the three developing countries involved with the project; and the documentation or essential information in the areas of design wind speeds and pressure coefficients, economic forecasting, secio-economic and architectural concerns, and construction detailing practices.

The project also inaugurated the training of professionals and technicians in developing countries to carry out wind measurement and data analysis. In addition, the project set out deliberately to create linkages for transfer to, and information use by mem-

bers of the building community, including the general public.

The following text presents the goals and objectives of this project, reviews the procedures used to carry out the assignments, and identifies benefits an 4 future needs.

#### 1.1 GOALS AND OBJECTIVES

The project's primary goal was to reduce loss of life and property, human suffering, disruption of productive capacity, and expenditures for disaster relief resulting from the effects of extreme winds on low-rise buildings.

The objectives for carrying out this goal were: 1) to learn more about the effects of high winds on low-rise buildings; 2) to develop improved siting design, and construction information which would improve the resistance of buildings to extreme winds and be culturally acceptable to the general public; 3) to provide training to local professionals and technicians in performing wind-load measurement and analysis and wind-tunnel testing; and 4) to provide a large-scale transfer of technology to promote use of these improvements in design and construction, as well as new climatological, sociological and economic findings.

#### 1.2 BACKGROUND

Wind loading of tall buildings has recieved considerable attention during the past ten years, but little parallel work has been devoted to buildings less than 10 m high. Post-disaster investigations of wind damage suggest that design pressure coefficients contained in most current codes and standards do not adequately reflect wind characteristics near the ground, nor the true nature of pressure fluctuations on low-rise buildings. Highly localized wind pressures on buildings tend to be underestimated, whereas overall pressures tend to be overestimated. This is in agreement with the results of full-scale tests carried out during this program.

No less important to understanding wind loads on buildings is the selection of appropriate design wind speeds in areas having a high frequency of tropical storms. By taking into account local storm frequencies and terrain effects, design speeds can be specified such that the risk of wind damage to properly designed and constructed buildings is acceptable. This will allow the building designer to specify more realistic design-loads and should result in better performance of buildings during their expected life.

High-level decision makers in the Philippines, Banglidesh and Jamaica took part in the study. The individuals participating in this project were selected on the basis of their potential for carrying out this research effort and their ability to transfer research results, including their implementation, to their respective geographic areas.

The project was centered in the Philippines. There, Luzon Island experiences the highest annual frequency of tropical storms2 in the world, and 50 percent of the Philippine population lives within this area. Because of the area's climatology and the variety of problems created by the rapidly spiraling population (36.7 million people estimated by the 1970 census, with an annual growth rate of three percent), loss of life and property can be expected to increase in the years ahead. Post-disaster reports on the impact of typhoons indicate millions of dollars of property are damaged annually, and hundreds of lives lost due to these typhoons. In 1°70, the Philippines experienced four typhoons; these caused over 1,000 deaths and \$45 million damage to property, including, the loss of 9,000 public school classrooms. Over 300,000 school children were affected by the storms. The Philippines therefore is a natural laboratory to measure wind loads on buildings.

The other areas selected also are heavily populated and experienced extreme winds; they include the Bay of Bengol countries and the northern-Caribbean Islands (see fig. 1). Stars on figure 1 denote countries directly participating in this project.

#### 1.3 PREPARATORY ACTIVITIES

I arly in the project the NBS project team traveled to seven developing and developed nations to introduce the study to members of the local building community and to assess the ability of building research organizations in developing countries to carry out research into the effects of wind on buildings.

After the Philippines had been selected as the site for the principal measurement effort the need arose to establish a board of leading officials in the Philippines to advise and participate in the project. This board, called the Philippine Advisory Committee (PAC), consists of over 20 leading individuals representing governmental agencies, an academic institution, . housing authorities, building research laboratories, financial lending institutions, professional societies plus the AID Mission to the Philippines and the NBS Representatives of CARL Inc. in Bangladesh and building consultants from Jamaica and Bangladesh also took part in PAC's discussions. PAC has met regularly during the project, and is expected to continue to meet, to continue the data collection and analysis program and to further integrate the project's results into that nation's everyday planning, design

Wind speeds greater than 18 m/s

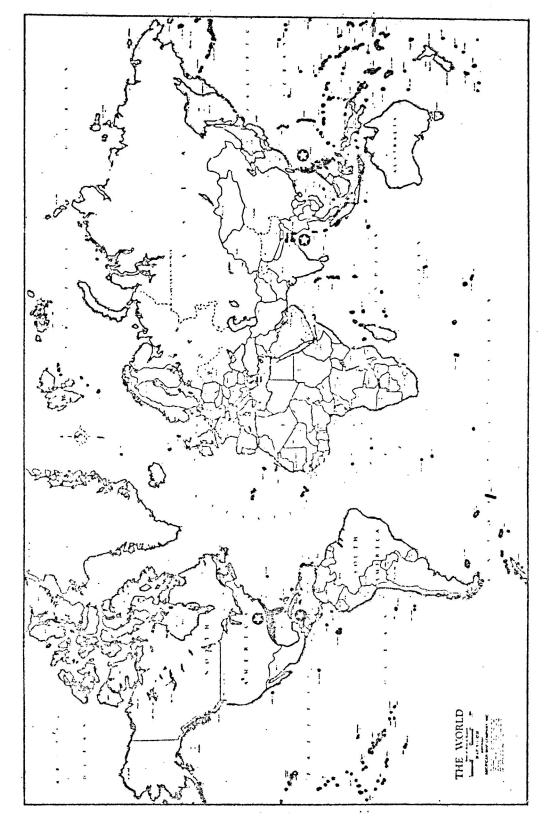


FIGURE 1 GEOGRAPHIC LOCATIONS OF WIND-PRONE COUNTRIES PARTICIPATING IN THE STUDY.

and construction practices. Similar advisory and support arrangements were set up with the building communities in Bangladesh and Jamaica.

Early in the project, sites were identified by PAC for conducting full-scale tests. The three sites chosen were weather stations operated by the Philippine Atmospheric Geophysical and Astronomical Services Administration (PAGASA) at Quezon City, Daet and Laoag City (see fig. 2). Site selection criteria included: frequency of extreme winds, easy access, rehable commercial power, type of wind exposure and site security. Arrangements with individual representatives of PAC were made to build test houses at the sites and to instrument these for measuring and recording wind speed and pressure.

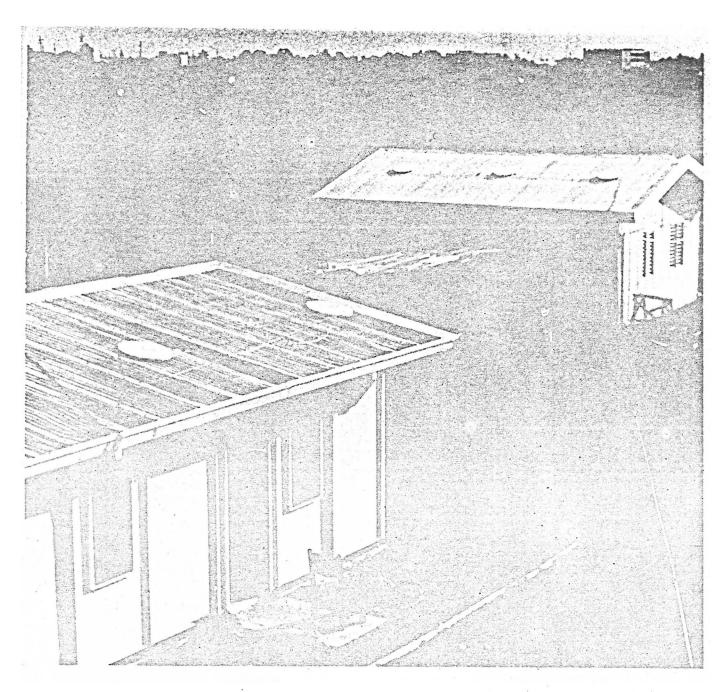


FIGURE 2 FIELD TEST SITES.

Full-scale field tests were supplemented by wind-tunnel model studies at the University of the Philippines' National Hydraulic Research Center. An aeronautical tunnel was modified to make it suitable for simulating atmospheric surface flows. Models of the tull-scale buildings were built by local technicians and tested in the tunnel. These model tests were designed to aid in the positioning of instrumentation on the full-scale test houses and interpretation of field test results.

Finally, since research findings are valuable only if the technical, economic and cultural environment is right for their acceptance, NBS retained consultants from Bangladesh, Jamaica and the U.S. to develop information on the socio-economic features of the three countries being studied, on the economic aspects of predicting housing need, and on recommended siting, design and construction practices.

Facing Page: These houses have been instrumented with pressure sensors (round disks) to help understand the wind loads they experience.



# 2. REVIEW OF PROJECT ACTIVITIES

# 2.1 DEVELOPMENT OF INFORMATION THROUGH MEASUREMENT

The bulk of the research centered around field studies (direct measurement of wind loads on six low-rise buildings at the three separate sites in the Philippines) and wind tunnel studies (scafe models of the field test buildings and models of other typical dwelling geometries). The chief purpose of these studies was to develop design pressure coefficients for low-rise buildings.

#### 2.1.1 Full-Scale Field Tests

Single-story test houses were built at the Quezon City site (three houses) and at the Laong City site (two houses). An existing single-story weather bureau building was used at the Daet site.

The houses were instrumented with pressure sensors and each field site was equipped with a propeller-

vane anemometer to measure wind speed and direction and a data acquisition system developed at NBS The data acquisition equipment used in the full-scale test program consisted of five basic systems; 1) the sensors or transducers, 2) a logic system, 3) a signal conditioner, 4) a recorder, and 5) a power supply. These systems were designed to continuously monitor wind speed and to initiate a recording sequence when the speed exceeded a preset level (about 20 m/s). The system then would record speed and pressure data for approximately 20 minutes and then enter a 30-minute "hold" period. The total recording time available on a reel of tape was approximately six hours. Thus, the total time period between changes in tape reels (six hours of recording plus six hours of "hold" periods during continuous high wind conditions) was over 12 hours; this was enough tape for most typhoon passages.

Wind speed and direction were measured by a propeller-vane anemometer mounted on a 10 m mast located far enough from the test buildings to register undisturbed wind speeds. The recording sections consisted of a 14-track analog tape unit with reels containing 1100 m of magnetic tape.

To ensure uninterrupted power in a storm, all three sites were equipped with a back-up system of batteries. Whenever commercial power is interrupted, the batteries automatically pick-up the load for about eight hours of continuous operation.

Since typhoon winds can come from any direction, it is difficult to determine a "best" configuration or array of pressure transducers. Because roof structures are the most susceptible to wind damage, they were allocated the greatest number of transducers. Extreme pressures acting along ridge lines, eaves and roof corners were of interest, as were the average uplift presures acting on the overall roof area. Pressure transducers were arranged differently on each test building to provide a wider range of transducer combinations for the assessment of localized and overall pressure fluctuations. Transducers also were installed inside the building to measure internal pressures, as these pressures strongly influence the net roof up litt loads.

Over the three years of the study, approximately forty hours of recordings were obtained and processed.

#### 2.1.2 Wind Tunnel Studies

While tull-scale tests provide valuable information on the nature of wind forces and the response of buildings to these forces, they generally do not allow detailed and systematic study of the various parameters involved. It is usually necessary to resort to modeling techniques to provide sufficient data on which to base design criteria, using the full-scale.

results to check the validity of the model. For this reason, and also to provide a facility to racet future research needs, the wind tunnel at the National Hydraulic Research Center (NHRC), University of the Philippines, was modified so that the lower portion of the atmospheric boundary layer could be modeled. Techniques used to establish an acceptable degree of similitude were developed for this particular application in a similar wind tunnel at Colorado State University and involved the installation of tapered spires at the entrance to the test section, followed by surface roughness elements placed on the floor of the tunnel and extending downstream to the location of the building model. Details of the modeling technique are described in Simulation of Atmosphéric Flows in Short Wind Tunnel Test Sections, which may be found in reference 2, page B-1.

The NHRC wind tunnel has a test section 1.2 m square and 3.7 m long. Maximum air speed with a clear test section is approximately 30 m/s. While a tunnel with a larger test section would have simplified the modeling problem, surface pressures measured on a 1:80 scale model of Test House No. Lat Quezon City (see fig. 3) correlated well with the full-scale measurements. This model, installed on a turntable at the downstream end of the test section, is shown in figure 4. In addition to providing guidance for the optimum location of pressure transducers in the full-scale studies and aiding in the interpretation of records obtained from these studies, the NIHD tar sel was also used to study a model of a Bayanshan School Building. A large number of these buildings were constructed with AID funding following the typhoons of 1970 and the objective of this wind tunnel study was to evaluate the loads used in the original design and refine these loads for future construction. A typical Bayanihan School Building is shown in figure 5 and results of the study are presented in a report, Wind Tunnel Studies of RP-US Bayanthan Permanent School Building (see reference 17, page B-1).

The NBS initiated a series of comprehensive wind tunnel tests at the Virginia Polytechnic Institute and State University (VPI and SU) where a larger test section was available and the atmospheric boundary layer had previously been modeled successfully. The tests covered 32 combinations of roof slope, height-to-width ratio, length-to-width ratio and size of roof overhang. Detailed discussion of the test results is reported in the VPI and SU report, Wind Tunnel Model Investigation for Basic Dwelling Geometries (see reference 12, B. 1). The influence of roof slope on wind loads for the models tested is summarized below.

Zero-degree roof slope. Peak pressures occur at points close to the upstream roof edge with the wind normal to the edge and deviating ± 60 degrees from the normal direction. Towards the center of the roof the mag-



FIGURE 3 TWO TEST HOUSES AT QUEZON CITY SITE.




FIGURE 4 PHOTOGRAPH OF SCALE
MODEL OF FIELD TEST
HOUSE INSTALLED IN
UNIVERSITY OF
PHILIPPINES WIND TUNNEL.



#### FIGURE 5 BAYANIHAN SCHOOL BUILDING.

nitude of the peak pressures decrease and the sector in which these peak pressures occur becomes smaller. The presence or the a sence of roof overhangs does not seem to influence the magnitude of the peak pressures or the sector in which they occur. The same is true for the length-width ratio, this variable does not seem to affect the peak pressures.

Ten-degree roof slope. Again, the peak pressures occur at the upstream edges of the roofs and decrease in magnitude towards the middle of the roof. The presence of the roof ridge does not show any effect on pressures near the ridge. The maximum pressures occur along the upstroam sloping edges of the roofs with the wind direction parallel to the roof ridge and in a sector deviating ±50 degrees from this direction. No significant effects due to the presence of root overhangs can be detected except for the case with winds parallel to the roof ridge. The magnitudes of the peak pressures along the sloping upstream edge of the roof are smaller than in the case where no overhangs are present. There is clear-evidence that the larger lengthwidth ratio decreases the magnitude of the peak pressures.

Twenty-degree roof slope. For this geometry, the presence of the roof ridge becomes important. Extremely large negative pressures do occur on the leeward side of the ridge with the wind direction making an angle of 45 degrees with the roof ridge. The overhangs and the length-width ratio do not seem to have any effect on the magnitude of the peak pressures. Winds parallel to the roof ridge create low peak pressures at the leading and sloping edges of the roof. In general, the magnitudes of the pressures towards the center of each roof slope are larger than previously experienced with winds normal to the ridge, both on the windward and leeward side.

Thirty-degree roof slope. The peak pressures occur at the leading edge of the roof with the wind of allel to the roof ridge in a sector of approximately 50 degrees on either side. In addition, large negative pressures are encountered on the leeward side of the roof, with the wind direction making an angle of approximately 45 degrees with the roof ridge. However, these peak pagative pressures are not as low as those encountered at the same location and with the same wind direction for twenty-degree roof slopes. In cases

where the winds are normal to the roof ridge, the upstream (horizontal) edge of the roof is not exposed to the large negative pressures encountered with flatter roof slopes. The largest negative pressures are encountered over the entire leeward roof area with the wind direction making an angle of approximately forty-five degrees with the roof ridge. Overhangs and length-width ratio do not seem to have any appreciable effect on the peak pressures in this case. These studies indicated that additional research is needed for roof slopes near 10 degrees.

In addition to the wind tunnel investigation of basic dwelling geometries just described, studies were also conducted at the test site in Quezon City. Results indicated that there was no unusual sensitivity of the building geometry to extreme winds. These studies, were published as, Wind Tunnel Investigation of CARE, Inc. Single-Family Dwelling, (see reference 14, page B-1).

### 2.2 COLLECTION OF COMPLEMENTARY DATA

Throughout the project the systematic use of literature searches, workshop/conferences and consultants yielded comprehensive information on listings of printed resources, socio-economic data, and guidelines for siting, design and construction detailing practices.

#### 2.2.1 Literature Search

Reports concerned with wind effects and building technology were collected from the NBs, the Department of State, AID, the National Oceanic and Atmospheric Administration, the Forest Products Laboratory, the Portland Cement Association, the National Technical Information Service and various US and overseas universities. Additional documents came from the Building Research Establishment in the United Kingdom through a collaborative research program with the NBS on wind loads on buildings. Copies of approximately 75 documents collected in this search were transferred to the PAC and the bibliography was sent to other participating developing countries. A list of all these documents appears as Appendix C of NBSIR 74-567 (reference 2, page B-1).

#### 2.2.2 Workshop/Conferences

One workshop and two conferences were hell during the course of the project, two in the Philippines and one in Jamaica. These served to elicit information on wind design, construction and socio-economic experiences; the conferences served as a key vehicle for the timely dissemination of project findings.

The workshop was held in Manila November 14-17, 1973. Entitled "An International Workshop on Effects

of Extreme Winds," it addressed the state-of-the-art inmitigating building damages caused by winds. Four themes were discussed: climatology and aerodynamics; structural engineering; socio-economic and architectural considerations; and codes and standards.

The workshop, attended by 140 professionals from Jamaica, Bangladesh, the United Kingdom, the Philippines and the United States, identified defects in data gathering procedures, identified gaps in wind loading data and the building process, developed recommendations to correct these defects and suggested improvements for good building practices. The proceedings of the workshop were published as NBS Building Science Series 56 (see reference 3, page B-1).

The first of two regional conferences was held in Marila, on May 16-17, 1975. The second was held in Kingston, Jamaica, on November 6-7, 1975. The purpose of these conferences was to provide project results to the professional building community in wind-prone developing countries. This was done to avoid long lag-time until publication of results (about 1-1/2 years in this case), thus allowing the countries to begin to implement results as quickly as possible. At the same time, it gave the NBS team a chance to receive technical feedback as to the relevance of project research to date. This feedback was of assistance in subsequent data collection and analysis and guided the preparation of final technical reports. The conference programs are contained in reference 8, page B-1.

#### 2.2.3 Summaries of Companion Volumes

The other volumes in this Building Science Series deal with design wind speeds and pressure coefficients, timber fasteners and masonry connectors leading to improved construction practices; forecasting housing needs; and socio economic and architectural implications. Each is published separately. A summary of each is presented below.

Nothing 2, Estimation of Exfreme Wind Speeds and Guide to the Determination of Wind Forces, contains two related reports. The first report, Estimation of Exfreme Wind Speeds—Application to the Philippines, concludes that design speeds currently used in parts of Mindanao can be reduced, whereas those in use for Northern Luzon and certain coastal exposures should be increased. The report also tocuses on problems of estimating basic wind speeds for very long mean recurrence intervals in tropical sform areas where wind records are often incomplete and many typhoons pass without being recorded.

The report contains a comprehensive review of probabilistic techniques for analyzing extreme wind speeds. It also provides for the correction of annual extreme speeds for the type of instrumentation used.

averaging time, height above ground, and type of exposure so that homogeneous data sets can be established. The two types of extreme value distributions in common use (Fisher-Tippett Type I and Type II) are then applied to the annual extremes for several Philippine stations using an NBS developed computer program. The author then compares the results of the analysis with design—peeds currently specified in the National Structural Code of the Philippines.

The second report, A Guide to the Determination of Wind Forces, presents a method for calculating wind pressures acting on building surfaces. This report also describes the basics of wind flow around buildings and the pressures created by these flows on building surfaces. Effects of such features as roof slope, roof overhang, and building openings are discussed. The report refers to material covered in its companion report and assumes that the basic wind speed either is known or can be calculated by the designer. A procedure for determining the design speed is presented. It takes into account general terrain roughness, local topographical teatures, height of building, expected life of building, and risk of exceeding design loads. Once the design speed has been obtained, the mean dynamic pressure may be calulated and pressures acting on walls, roots, and internal protions of buildings. may be determined by use of appropriate pressure coefficients presented in the report. Corrections then can be applied to the calculated pressure to account. for terrain roughness and height of building. Finally, the pressures are multiplied by the appropriate surface areas to obtain wind forces. The steps required to calculate pressures and total drag and uplift forces are summarized. The paper concludes with worked examples. These improved design criteria provide building professionals with more reliable design loads and are intended as the basis for wind load design standards in developing countries.

Volume 3 in this series, A Guide for Improved Masonry and Timber Connections in Buildings, contains material on recommended construction practices. The report discusses three basic structural systems pole type, masonry bearing wall and timber. Examples of wind damage are included through use of text and photographs-Cases in which madequate fasteners and improper design contributed to root damage or lift off followed by collapse of the entire structure are described.

The authors, from N4S and Forest Products Laboratory, evaluate current construction practices in the tropics, and discuss local building products and standards compliance with the aid of photographs of buildings during various stages of construction. They also present current building practice in the United States, along with illustrations of various types of connectors and fasteners. While many of these connectors

and fasteners are not currently used in developing countries, they serve as a reference for improving local practices and customs.

Volume 4, Forecasting the Economics of Housing N. : 4s: A Methodological Guide, presents a method for decision makers in government and the private housing industry to determine the size of a region's unmet housing needs. This is an important first step in planning and enacting public policies and programs designed to improve the size, condition and quality of a nation's housing inventory. The procedure makes use of readily available data such as family income, housing expenditure and the established regional poverty line. Procedures are developed to compare the costs with the potential income redistribution effects of meeting the housing need shortfall. They have been designed to be flexible and adaptable to situations in which housing and demographic data may be sparse. The calculation of current housing needs is divided into 11 steps or tasks. These in turn are grouped into tour major areas of investigation-description of housing inventory, determination of the housing standard, determination of the need for "shortfall matrix") and calculation of the cost of meeting the housing needs. An extended example is included

Volume 5, Housing in Extreme Winds: Socio-economic and Architectural Considerations, reviews the importance of cultural acceptance of planning design and construction improvements that differ from traditional practices in developing countries. The report tocuses on the Philippines, Jamaica and Bangladesh and pinpoints typical socio-economic conditions that planners should take into account. These conditions include strong respect for traditional materials and methods of house construction and suspicion of innovative forms and approaches; a rising proportion of urban poor who live in squatter settlements, a still high proportion of rural residents, remote both from new building concepts and from post-typhoon hurricane relief programs; a very high ratio of citizens (in a range from 60 to 72 percent, depending on the country) whose incomes are at a level where they cannot attord housing of any kind seither on the open market or government subsidized, and a chronic shortage of capital funds to stimulate or support a national program for the construction of wind resistant housing. The importance of land from a social standpoint is stressed. The report cites benefits of the "sites and services" concept whereby low income persons are provided (through gitt, loan or lease) a site equipped with water supply, sewerage and electricity, but must erect and maintain a house upon it.

Architecturally, recommendations include placement of buildings to exploit the beneficial effects of terrain, and adherence to principles of good practice in the

configuration of roofs, walls, overhangs and openings. These recommendations are shown in the report by drawings.

Materials that are cheap, strong and locally available are recommended, and several innovative methods of construction are mentioned. They include stabilized or strengthened soil, and indigenous tibers and grasses for reinforcing concrete, adobe and brick. Plastics have been produced using local and imported raw materials. If used for shelter, plastics could result in an excellent low-cost house once the housing configurations become more familiar to the population. At first, plastics may be used for community service buildings such as clinics and schools.

#### 2.2.4 Summaries of Other Related Reports

At the mid-point of the project, additional information was collected from the December 25, 1974, cyclone which struck Darwin, Australia, and almost totally destroyed the city's residential areas. Due to the widespread use of corrugated galvanized iron sheet and light frame construction, the behavior of housing in Darwin will have a definite bearing on the development of design criteria for housing in other tropical regions of the world, especially those with frequent intense storms. NBS was invited to take part in post-disaster studies of Darwin, Close liaison developed and continues with Australian research establishments as they carry out follow-on projects related to Darwin. Some of these findings and recommendations such as improved fasteners for corrugated iron roofing sheets should work well in other countries which are prone to tropical storms (see reference 21, page B-4).

Dr. Jamilur R. Choudhury (Bangladesh) and A. D. Adams (Jamaica) were retained by NBS to prepare bacl, round reports on the wind conditions, socioeconomic profile and construction circumstances on their respective countries and geographic regions.

Dr. J. R. Choudhury prepared a report entitled Low-rise, Low-cost Housing and Extreme Wind-related Problems in Bangladesh. He sees a need for six million new rural houses over the next 10 years. The author points to the following projections and facts: enormous expected rise in population in his country over the next decade, to produce a high population density, a high frequency of disastrous typhoons; and negligible natural resources. In spite of an influx of rural families to the large cities raising urban populations by as much as 50 percent, the number of houses has remained about the same. Furthermore, by mid-1975, the high cost of building materials had brought new private building construction to a virtual standstill.

Reliable wind speed records are lacking and weather

stations are poorly equipped. The report suggests wind speeds for return periods of 20, 50 and 100 years at eight stations, but the author calls for a more thorough analysis of existing wind data before using the values for building design.

The author also reports briefly on housing and wind conditions in India, Bürma and Sri Lanka. Existing data suggests lower design wind speeds for these three countries except for the West Bengal, Orissa and Madras coasts of India where speeds compare with those for Barigaidesh. This report appeared as Appendix B of the NBSIR 75-790 (see reference 8, page B-1). It may be a dered seperately from the National Technical Information Service as PB 256-771 (see page B-1 for the NTIS address).

Mr. A. D. Adams, a Jameican consulting engineer prepared, Low-Cost Housing and Extreme Wind-Related Problems in Jamaica and the Northern Caribbean Islands. This two-part report identifies low-cost housing trends and their design problems in the region. It notes the influence of socio-economic factors on housing patterns and presents an analysis of housing needs over the next ten years.

Between 1975 and 1985, the author sees an average annual need of about 15,000 units, two-thirds of them for use by new households, the rest for replacement. These estimates are based on an anticipated population increase of 400,000 over the decade.

The private sector provides housing for middle and upper income groups. Only a small part of the government's housing effort has been directed at the lowest income groups. To relieve these pressures, the Ministry of Housing in 1972 began its Sites and Services Project aimed at providing 6,000 serviced lots in three years. The objective is to encourage self-help projects for prospective home owners who are largely unemployed.

The author presents extreme winds and wind damage statistics. Included are maximum gust speeds for return periods of 10, 20, 25, 50 and 100 years. The author notes that a basic wind speed of 54 m/s has been recommended for design purposes in the region. This is a three-second gust speed at 10 m above ground for a return period of 50 years.

In his conclusion, the author offers several solutions for mitigating losses due to high winds. These include: 1) an adequate hurricane warning system; 2) strict adherence to accepted structural standards accompanied by tight inspection during construction; 3) simple in "ructions set out in a "Manual of Accepted Practice" to guide engineers, architects, developers, etc. as a supplement to building codes; 4) à professional engineering registration law for those nations without one; and 5) special emphasis on the major

problem area of roof fastenings and anchoring provisions. Accurate data on design forces, or recommended standard details, would ensure both economy and a consistent and adequate standard of safety. The complete two-part-report appears in reference 2, page B-1.

The paper, Socio-Economic and Architectural Considerations in Housing, was delivered at the November 14-17, 1973 Manila workshop by Geronimo V. Manahan and Dr. Josefina M. Ramos. The authors note that 85 percent of the potential wage earners in the Philippines have basic economic problems—no jobs or not enough income. This has led to malnutrition, ill health and environmental health hazards. Only 14 percent of urban families could afford housing in the open market; 36 percent could afford home ownership provided they were extended long-term financing at a reasonable rate of interest. The remaining 50 percent could not afford shelter even at reduced rates.

The problems are too basic to be resolved merely by upgrading shelter; rather, what is needed according to the authors is a system — eliminate urban poverty and lack of education, in addition, there is annual need for 100,000 units to cover new households population increases and replacement of slum and squatter houses. The problems are aggravated by the high cost of land and building materials.

The authors offer four recommendations. 1) the long tradition of indigenous building should be exploited to develop concepts for architectural adaptations to a harsh environment; 2) not only economics and technology, but the cultural practices and benefits of the people should be parameters in the design of their shelters; 3) environmental design and landscaping approaches may offer major benefits by reducing wind loads on structures; and 4) a systematic analysis of building components, for resisting not only highwinds but also floods and earthquakes, should be undertaken. The proceedings, which include this paper, appeared as NBS Building Science Series 56 (see reterence 3, page B-1).

A related low-cost housing design project was carried out by a Carnegie-Mellon University team headed by Dr. Charles H. Goodspeed and Professor Volker H. Hartkopt. Results have been published as, Feasibility Test of an Approach and Prototype for Ultra-Low Cost. Housing. In 1974 and 1975 the team—which included architects, engineers, planners and sociologists—developed a prototype, very low-cost (goal: \$10 per person per shelier) housing unit for use in a variety of relief and rural development situations in Bangladesh. The prototype an "A" frame modular housing system, accomodates a wide variety of local, indigenous materials. The structure is cheap, labor intensive easily erected and reportedly resists wind and

floods. The prototype structure has yet to be systematically tested in a high-wind situation, so its performance under such conditions is largely unknown.


Dr. Vijai Singh, a sociologist on the team underscores a theme found in Volume 5—that of importance of cultural acceptance. He believes that the structures could be made more acceptable by lowering their height and changing their appearance to conform to the traditional structures. In this regard, several different door styles were tried, but none proved popular and residents suggested a bigger entrance and a door that could be shut and locked.

Local people complained about the tightness of space inside the structures and felt they had been built without due concern for the needs of the families living in them. Most complaints centered on lack of storage and kitchen space. Residents in some areas felt the windows were too high, and should be lowered so some air could flow at the floor level. It was difficult to sleep inside in hot and humid weather.

Three related economic reports came to the NBS team's attention as this project progressed and they deserve mention here, Alvare by Professor Fred Moavenzadeh, Department of Civil Engineering: Massachusetts Institute of Technology.1 These unpublished reports, prepared for various United Nations agencies, offer the interested reader a useful overview of the typical economic status of housing industries in developing countries. The author examines these industries from the viewpoints of their management and financing problems as well as construction technology and materials. He points out that technical solutions to housing should involve a high labor content since labor is plentiful but foreign exchange, needed to import manufactured materials or to build elaborate domestic production plants, is scarce. In this regard, the author favors several new materials, such as plastics, that require a reasonably simple production technology. He advocates that the sites-and-services concept be included in municipal or regional zoning programs in developing nations.

Moavenzadeh, Fred, Building Operation and the Choice of Appropriate Technologies for Conditions Prevailing in Diveloping Countries (December 1975), Shelter: Experience, Problems and Solutions Rebited to Formal Building Industry (2nd Draft, December 1976), and Industrialization of Production and Assembly of Prefabricated Flowert, and Components Prepared for Joint Consultation on Prefabrication for Industrial Construction (2083). Industrial Development Organization, Poland, Sept. Oct. 1975).

Facing Page: Millions worldwide live in houses highly vulnerable to winds. Activities such as these under technology transfer will make future homes, and lives, safet.

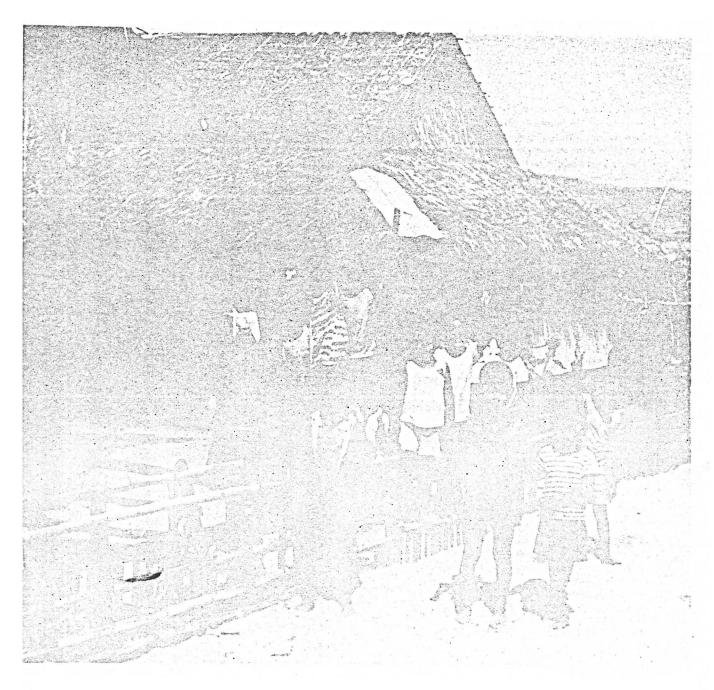

#### 3. INFORMATION TRANSFER

A basic concern of the NBs, AID high wind project has been the need to transfer the project findings to the various organizations and individuals in developing countries who face the possibility of human and property loss due to high winds. These target groups of users are:

- Government policy makers
- Private developers
- · Regulatory officials
- Financial lending institutions
- Design professionals

- Manufacturers
- Professional architectural and engineering societies
- University start
- Local craftsmen
- The general public—as building user and tenant

The proposed plan for transferring information to these groups recognizes their different backgrounds and information requirements. For example, local craftsmen and the general public in some cases may

need rather unsophisticated written information but will readily comprehend various types of isual material. Thus, drawings with minimum text are essential. By contrast, design professionals require information at a higher technical level. Information transfer, was initiated through several approaches. They are discussed below.

#### 3.1 REGIONAL WORKSHOP/CONFERENCES

As noted in section 2.2.2, one workshop and two conferences were held during the course of the project—two in Manila and one in Kingston. These meetings gave individuals from the building community the opportunity to present papers, to learn about research results to date, to ask questions, and to speak out as to the future direction to the project. Another benefit was that of establishing solid working relationships with many of the prospective users of the research findings.

The results of these communication efforts are significant. In the Philippines, project information provided the first step in revising the National Building Code (Section 2.05, Wind Pressures) and this will lead to improved building practices. The Commonwealth Caribbean countries are in the process of upgrading their building rode. This project's information will be considered as their building code is revised. Bangladesh, Haiti and other developing countries will use portions of the technical information in revisions of their building code.

Transfer is not limited to developing countries. Test data will be made available to the subcommittee on wind loads of the American National Standards Institute for possible incorporation into American National Standard A58.1—Minimum Design Loads in Buildings and Other Structures.

#### 3.2 WIND REFERENCE COLLECTION

Two copies each of 75 documents dealing with wind effects on buildings and other engineering structures were transferred to the Philippines Advisory Committee. One copy was placed in the University of Philippines Library. These reports serve as a comprehensive library collection. The reports are listed in Appendix C of NBSIR 74-507 (see reference 2, page B-1).

#### 3.3 16-mm SOUND MOVIE

An 18-minute user-oriented 16-mm color and sound movie, entitled. Extreme Wind Study," was produced by NBS (see reference 9, page B-1) which summarizes the high wind research project, h is aimed at several audiences, technical, semi-technical and the general public.

By illustrating the destructive effects of winds on

buildings, the film tells viewers about the NBS field testing activities as well as the wind tunnel testing program. Computer graphics are used to depict the actual effect of wind on buildings. Filmed mostly in the Philippines, it shows the three test sites, the wind tunnel, and the participation of the NBC team as well as architects, engineers, building officials and university staff at the workshop and test sites.

Through December 1976, 28,000 individuals had viewed the film. These people represent professional societies, academia, trade groups, U.S. Federal Agencies and schools. The film was awarded a Silver Cupfirst Place, at the 10th International Educational and Television Film Show at the Rome Fair held from May 29-June 13, 1976.

Facing Page: Technicians install pressure sensor on a test house at Daet, Philippines.



# 4. ACCOMPLISHMENTS OF THE NBS/AID HIGH WIND PROJECT

The project has demonstrated that it is possible to design and build safer low-rise buildings at an acceptable cost by: a) using improved criteria in determining wind forces on low-rise buildings; b) reliable planning, design and construction prectices; c) using a simplified method for forecasting housing needs; and d) providing sound principles which allow for local housing preferences and traditions.

There have been six major benefits as a result of this

#### project:

- Improved design criteria have been developed to guide architects, engineers and builders.
- By means of workshops and the various other information transfer vehicles, greater concern has emerged in developing countries for improved ways to guard against the effects of extreme winds, and for the methods to do the job.
- Interactions between members of the building

community representing government, industry, professional and academic groups and decision makers in the participating wind prone developing countries were stimulated by this project.

Vital training of professionals and technicians has begun in developing countries for carrying out wind measurement and analysis procedures.

Essential but scattered documentation on good practices has been identified for use by the building community.

Technical information has been failured to meet the user's needs.

Facing  $F_{\alpha}(x)$ . We dominate an interpretable to the properties test houses. Such respective all Lethelms is for the question building practices.



# 5. NEEDS AND RECOMMENDATIONS

Important tasks remain to be completed if annual losses of life and property due to extreme winds are to be brought under control. To this end nineteen recommendations were developed.

- Establish a national center in developing countries to promote information exchanges with meteorologists and climatologists, the design professions, regulatory officials, building authorities and local craftsmen on matters concerning the design of buildings to resist wind forces.
- 2. Establish comprehensive programs of improved land use planning to reduce the damage potential of extreme winds and heavy rainfall.
- 3 I neourage meteorological agencies and related groups to collect mean-hourly wind speed and peak gost data and disseminate this information in a useful form to private and governmental groups involved with building designand construction.
- 4. The meteorological services in developing



- countries which regularly experience hurricanes.or typhoans should take the lead in improving the distribution, density and siting of wind observation stations.
- Buildings having-unusual shapes and structural characteristics that are not covered by recognized codes of practice should be subjected to appropriate wind tunnel model studies.
- Provide for conducting post-disaster surveys by appropriate government and private groups.
- Establish an international wind research center and support it through appropriate organizations to study the effects of winds on buildings.
- Incorporate project test results in the codes and standards of developing countries and have these done in a format easily understandable by local urban and rural officials.
- Recommend that standards-generating committee: in developing countries take note of the findings of this project as they consider development of new or revised standards for wind-resistant construction.
- Architects and engineers in public and private practice entrusted with building design and construction so, any ision should be licensed by an appropriate professional licensing board.
- The professional engineering and architectural societies should viork closely with colleges and universities to develop courses of study for engineering and architectural students related to the effects of wind on Ecoldings.
- Develop and carry out programs of continuing education at all levels of society for individuals involved in the design and construction of buildings.
- Structural design for wind loads should take into account the local wind climate and the effects of surrounding terrain and neighboring structures on the characteristics of surface winds.
- 14. The design of rooting and cladding elements should consider the effects of local pressure fluctuations near the corners of walls, along the edges of roofs and under caves.
- 15. Conduct a pilot program to develop, design, build and evaluate housing in selected regions subject to high winds, using recommended good practice, and based on major involvement of local people in site selection, planning, design, manufacture of components and erection.

- Explore further the problems of maintaining soundly built housing to preserve its resistance to high winds.
- Evaluate the actual use in participating nations of the content and format as required to obtain the broadest possible dissemination in each of those nations.
- Explore channels for expanding information linkages with all nations and regions subjected to extreme winds.
- Investigate further the transfer of information to the local craftsman level.

#### Appendix A PARTICIPATING **ORGANIZATIONS**

The following organizations participated in and made valuable contributions to the research project.

Bangladesh

Bangladesh University of Engineering and Technology CARE, Inc., Bangladesh

Harti

Ministry of Public Works

Jamaica

Douet, Brown, Adams and Associates,

Consulting Engineers

Jamaican bureau of Standards

Jamaican Institution of Engineers

Jamaican Meteorological Office

Kingston and St. Andrew Corporation,

City Engineers

Ministry of Housing

Social Action Center

Japan

Kvoto University

Ministry of Construction

The Parl ppines.

Association of Structural Engineers

of the Philippines\* Bureau of Public Worl's\*

Civil Aeropouts. Administration!

Lotest Products Poscarch and

Industries Development Commission\*

Government Service Insurance System\*

Land and Flowing Development

Corporation\*

National Building Code Committee\*

National Hodsing Corporation\*

National Institute of Science and

Technology

National Science Development Loard\*

Notional Societ is a Scismology and

harthquake the meesing of the

Prohippines!

People's Homeste and Hossing

Corporation\*

Philippine At neigher a Geophysical

and Astronomical Services

Administration

Philippine Insature Howard

Corporation\*

Pl. 1 pyton Aim, spheric Ceopm skull

and Astrona niest between

Administration\*

Phyloppie i Institute of Civil

Facincers\*

\*Mendor, Milippine Advisory Committee.

Philippine Standards Association\* Social Security System\* University of the Philippines\* Republic of China (Taiwan) National Bureau of Standards United-Kingdom **Building Research Establishment** Department of the Environment United Nations United Nations Economic Commission for Asia and the Far East United States of America Agency for International Development, United States Department of State (Project Sponsor) Agency for International Development Missions; Manila, Philippines: Kingston, Jamaica; Dacca, Bangladesh; Port-au-Prince, Care, Inc. Colorado State University Forest Products Laboratory, Department of Agriculture National Foreau or Sturble Oct. Department of Commerce United States Air Lord. Virgian Polytechnic Institute

and State University

#### Appendix B REFERENCES

This appendix is divided into four sections; a) project output references, b) wind measurements and design loads, c) socio-economic factors and housing characteristics and d) planning, design and construction technology. Each section lists reports and other documents under various reader interest headings. Under the first section are reports/listed in chronological order as they were developed during the course of the project. The other three headings list reports used during the course of this project and documents which contain information relevant to the planning and design of low-rise buildings in wind prone areas.

Documents noted in the list of references by NTIS may be ordered from National Technical Information Service, US Department of Commerce, 5285 Port Royal-Rd., Springfield, Va. 22161. Likewise, doguments noted by Superintendent of Documents may be ordered from the US Government Printing Office, Washington, DC 20402. Other reports may be obtained by writing the author or borrowed from an appropriate library.

#### CHRONOI OGICAL PROJECT OUTPUT REFERENCES

- (f) Raulaste, N. J., and Marshall, R. D., FY 1973 Progress Report on Design Criteria and Mathodelogy for Construction of Low-Rise Buildings to Better Resist Typhoons and Hurricanes, NBSIR 74-582 (Washington, D.C.: National Bureau of Standards, 1973). Available from N IIS, COM 74-11645.
- (2) Raufaste, N. J. and Marshall, R. D., FY 1974 Progress Report on Design Criteria and Methodology for Construction of Low-Rise Buildings to Better Resist Typhoems and Hurricanes, NBSIR 74-567 (Washington, D.C.: National Bureau of Standards, 1974). Available from NTIS, COM74-11631.
- Raufaste, N. J., and Marshall, R. D., editors. Development of Improved Design Criteria to Better Resist the Litects of Extreme Winds for Low-Rise Buildings in Developing Countries, BSS 56 (Proceedings of Workshop at Manila, Nov. 14-17, 1973) (Washington, D.C.: National Bureau of Standards, 1974) Available from the U.S. Government Printing Office, C 13.29/2.56.
- (4) Peterka, J. A. and Cermak, J. I. Simulation of Atmospheric Flows in Short Wind Tunnel Test Sections, Report CER73-74 JAP-JLC32 (Fort Collins, Colorado State University, June 1974).
- Gong, R. D., "Seeking Saler Shelter Through Science," Horizons-USA, (Manila: U.S. Information
- Service, 1974), p. 32.

  (6) Angeles, C. B., "Operation typhoon-resistant buildings," Horizons-USA (Manila US, Internation Ser vice, 1974), p.36. Nash, H. "To Survive the Wind," War on Hunger
- (Washington, D.C., U.S. Agency for International Development, August 1975), p.6
- (8) Raulaste, N. J., and Marshall, R. D., FY 1975 Progress

- Report on Design Criteria and Methodology for Construction of Low-Rise Buildings to Better Resist Typhoons and Hurricanes, NBSIR 75.790 (Washington, D.C., National Bureau of Standards, 1975). Available from NTIS PB 250-848 9WB.
- (9) Raufaste, N. L. and Meininger, R. "Extreme Wind Study" (16 mm Color/Sound Moviel (Washington, D.C., National Bureau of Standards, 1975). Available from the National Audiovisual Center, General Services Administration, Washington, D.C. 20409, or on free loan from Association Sterling Films, 600 Grand Avenue, Ridgefield, New Jersey 07657,
- (10) Marshall, R. D. Reinhold, T. A. and Tieleman, H. W., "Wind Pressures On Single Family Dwellings" (Proceedings, ASCE/FMD Specialty Conference on Dynamic Response of Structures) (Los Angeles University of California, March 1976)
- (11) Tieleman, H. W., Reinhold, T. A., and Marshall, R D., "On the Wind Tunnel Simulation of the Atmospheric Surface Laver for the Study of Wind Loads on Single-Family Dwellings" (Proceedings, ASCE/FMD Specialty Conference on Dynamic Response of Structures) (Los Angeles, University of California, March 1976)
- (12) Tieleman, H. W. and Reinhold, T. A., Wird Tunnel Model Investigation for Basic Procling Geometries. Report VPT L 76-8 @lacksburg Virginia Polyterionic Institute and State University, May
- 1976) Available from NTS, LB 255 070 AS (13) "Houses vs. High Winds," NBS Darren fors (Washington, D.C.: National Bureau of Standards April 1976).
- (14) Tieleman, H. W., and Gold, R., Wind Tunnel Investigation of CARF, Inc. Single-Lamely Dureling. Report VPI-E-76-22 (Blacksburg, Vinginia Polytechnic Institue and State University, November 1976).
- (15) Raufaste, N.J., "High Wind Study in the Philippines," Wind and Seismic Effects," SP4701Proceedings of 7th U.S. Japan Cooperative Program in Natural Resources Panel Conference) (Washington, D.C. National Bureau of Standards, 1977).
- (16) Raufaste, N. J., 'Wind Loads on Low-Rise Buildings." Wind and Seismic Effects, SP477 (Proceedings of 8th US-Japan Cooperative Program in Natural Resources Panel Conterencel (Washington, D.C.) National Bureau of Standards, 1977).
- (17) Marshall, R. D., Wind Turnel Studies of RP-US Bayanthan Permanent School Building NBSIR 77-1196 (Washington, D.C.: National Bureau of Standards,
- (18) Kliment, S. A., Raufaste, N. J., and Marshall, R. D., 43 Rules How Houses Can Better Resist High Winds, NBSIR 77-1197 (Washington, D.C.: National Bureau of Standards 1977).

## WIND MEASUREMENTS AND DESIGN LOADS

- The Assessment of Winds Loads (consolidated new edition of Digests 99, 101 and 105), Digest 119 (United Kingdom, Building Research Scion, July 1970).
- Bearman, P. W., An Investigation of the Forces on Flat Plates in Turbulent Flow, NPI, Acto Report 1296 (April 1969).
- (3) Bearman, P.W., Some Recent Measurements of the Flow. Around Bluff Bodies in Smooth and Turbulent Streams (Symposium on External Flows, July 4-6, 1972) (Bristol, University of Bristol, 1972).
- (4) Bickford, Capt. J. M., The Design of Single and Double Storey Hurricane Resistant Buildings, no. 18 (United Kingdom Royal School of Civil Engineering, May 1972)
- (5) "BSFCP3. Chapter V: Part 2. Wind Loads," Code of Basic Data for the Design of Buildings (London: British Standards Institution, September 1972)
- (6) Cermak, J. E., "Laboratory Simulation of the Atmospheric Poundary Layer," J1, vol. 9, no. 9 (Presented at Session on Fluid Physics of Pollution, American Institute of Aeronautics and Astronautics 3rd Fluid and Plasma Dynamics Conference, June 29 July 1, 1970, Los Angeles, California? (Los Angeles, American Institute of Aeronautics and Astronautics, 1971)
- (7) Cermak, J. L., and Sadeh, W. Z., Wir I-Tunnel Similarien of Wind Loading on Structures, Proprint 1417 (National Structural Engineering Neetings (New York: American Sweety of Conf. Eng. nects 1971).
- (SI) Constell, D. J., and Lee B. L., Medials and Consequences of Alms physical cardiacy have a Sociality of IAGAR 2 Conference Prince chains 280-485 Actor dynamics of Almospheric Shear Flows? (Mur.ich, Soptember 1960).
- (9) Cool, N. L, "A Boundary Layer Wind Funnel for Building Aerodynamics," Journal of Industrial Aerodynamics, vol. 1, no. 1 (hips 1975)
- (10) Dalphesh, W. A., and Garden, G. K., Influence of Win I Pressures on Icon Performance. Technical Paper 264 Conada. National Research Council, September 1968.
- (11) Davenport, A. G., "Gust Loading Factors," Journal of the Structural Division Proceedings, vol. 93, no. 573 (New York, American Society of Civil Engineers, June 1967).
- (12) Davenport, A. G., "Rationale for Determining Design Wind Velocities," Journal of the Struct. et al. Dissibility Procedures, vol. So, no. \$15, part 11 New York, American Society of Civil Engineers, Van. 1969.
- 410 Dikkers, R. D. Marshall, & D. and From, H. C. S., Hurricone Camille, Leelong, P.Notoes of Voashington, D.C. Nation of Bureau, or standards, 1960. Available from the NTIS, COM 14-19456.
- (14) Laton K. Liand M. Color, C. Distribution and Analysis of Full-Scale West Personne Transactions of CP 169 (United Kingdom, Building Pescarch Station, 1969).
- (15) Laton K. L. and Moyne, J. R., The M. Statement of Wir. (Pressure on The Story Houses at Ayle dury, CP 7074 (United Kingdom, Department of Environment, 1974).
- (16) Iones M. In: A Remind of the Literature in the Structure of Word Lachalesce with Special Knowledge its Effect on Buildings, CC 85. (Aunded Kingdom, Building, Research Station, 1964).
- (17) Leutheusser, H. J., and Laines, W.D., "Stanfitode

- Problems in Building Aerodynamics," Journal or the Hydraulics Division Proceedings, vol. 93, no. HY3 (New York: American Society of Civil Engineers, May 1967).
- (18) Marsh III, R.D., Engineering Aspects of Cyclone Tracy, Darwin, Australia, ISS 86 (Washington, D.C.; National Bureau of Standards, 1974). Available from the U.S. Government Printing Office, C13 29,86.
- (19) Marshall, R.D., "A Study of Wind Pr. sures on a Single-Family Dwelling—in Model and Full Scale," Journal of Industrial Aerodynamics, vol. 1, no. 2 (October 1975).
- (20) Marshall, R.D., and Thom, H.C.S., editors, Wind Loads on Buildings and Structures, BSS 30 (Washington, D.C.: National Bureau of Standards, 1970). Available from NTIS, COM 71-00141.
- (21) Melbourne, W.H., "Comparison of Pressure Measurements on a Large Isolated Building in Full and Model Scale" (Proceedings of Third International Conference on Wind Effects on Buildings and Structures, Tokyo, 1971) (Tokyo: Sarkon Co. Itd., 1971).
- (22) Newberry, C.W., Significant Features of Wind Loading in Relation to the Design of Structures, CP 49(6) (United Kingdom: Building Research Station, 1969).
- (23) Newberry, C.W., and Laten, K.L., Wird Leading Handless (building Research Establishmen: Report) (London, Department of Unvironment, 1974).
- (24) Simila, L., and Filliben, H., Statistical An. Justis of Extense Winds, Technical Note 518, Washington, D.C., National Burrelli of Sci. of Sci. 307, 9. Available from the U.S. Government theory of Origin, C.Marson.
- Notional Fourity of Sciences, it is a Available for the U.S. Government of the condition of Challes and Color of Sciences of F. 1944 in Science of Analysis of the Technology of Association of Notional Area, is climated to 6.5880 by other from 10.08 at the all in mean of Standards, 1871. Available from N.1884 OMT 185007.
- (26) Standen, N. M., A.Spire Array for Generating The 3-Turbulent Shear Layers for Natural Wind Signalistics in World Fermils, Report L1231 April 2022, pp. 13721
- (27) Surdistem, F.R., Ludying G.R., and Skinner, G.T. Me leling of the Tool of the estimate of the Atmospheric Surface Lawer, 71-130 (AIAA) 9th Acrospine Same es Meeting) laneary 1971.
- (28) Tecrossion, H.W., Characteristics of the Micro Visid and Tree degree in the Planeting Counters Use or, UTEAS Review 32 (October 1972).
- C1. AS devices in Company and C1. As mall CS, "New Distributions of Fernance Winds in the Unit of States," he male the State final Distribution Proceedings, vol. (1) in STO one York American Society of Civil Trainness, he've these
- (30) Vel ozzi Land Colon E, "Gast Posponse Le Ess," Journal of the Structural Director Local times, vol. 94, no. 516 New York, American Science of Civil Liganos is Jano pross.
- (31) Vickery Johand Kalik, "Dragor Also py and Responded Slender Structured" loan about the Structure I Division Proceeds a Action 198, no. 841 (New York American Second of Cvit Impulsion, Janeary 1972).
- (32) Walser, GR., Leporter Cyclon: Trace—High Car Builtings—December 1971 vol. 1: Me tourne Australia a Dopartine of el llo sing and Construction 1973.
- (33) Wind Funderment Areaud Vol. Funders, Digest 144 (United Kingdom, Burkley palement). State and are 1972.
- (34) Wright, S.N., Kromer, S., and Ceiver, C., Builling Practices of Disaster Mittigature 1.88 in (Washington D.C., National Bosonier Scienderes, 1973) Available from N.Hs, COM73/8488.

# SOCIO-ECONOMIC FACTORS AND HOUSING CHARACTERISTICS

- Adams, A.D., Low-Cost Housing and Extreme Wind-Related Pr. Inlems in Jamaica, NBSIR 74-567 (Washington, D.C.: National Bureau of Standards, 1974). Available from NTIS 74-11631.
- Bueneman, E., Special Report on Techniques of Aided Self-help Housing(Washington, D.C.: Department of Housing and Urban Development, 1973).
- (3) Choudhury, J. R., First Report on Low-Rise, Low-Cost Housing and Extreme Wind-Related Problems in Bangladesh, NBSIR 75-790 (Department of Engineering, Bangladesh University of Engineering and Technology) (Washington, D.C: National Bureau of Standards, 1975). Available from NTIS PB 250-848.
- (4) Choudhury, J. R., Second Report on Low-Rise, Low-Cost Housing and Externe Wind Related Problems in Bangladesh (Dacca: Bangladesh University of Engineering and Technology, 1976). Available from NTIS PB 256-771.
- NTIS PB 256-771.
  (5) Dybbroe, O., "A Proposal for Program and Staffing," Building Research in Jamaica (Kingston: Building Research Unit, 1966).
- (6) Feasibility Test of an Approach and Prototype for Ultra Low-Cost Housing (for Carnegie Mellon-University, Pittsburgh, Pennsylvania, AID Office of Science and Technology) (Washington, D.C.: Technical Assistance Bureau, November 1975).
- (7) Housing in the Philippines, (Preparatory materials for the Conference on Housing) (Philippines: National Leonomic and Development Authority, 1973)
- Leonomic and Development Authority, 1973)

  (8) "Human Settlements," Architectical Record (May 1976), ps/6-160.
- (9) Improvement of Slums and Uncontrolled Settlements (Report of Interregional Seminar, Medellin, Columbia, February 15 - March 1, 1970 New York: United Nations, 1970) Sales No. 171 IV 6
- (10) Koemigsberger, O., Mahoney, C., and Evans, M., Design of Low-Cost Housing and Community Facilities, Vol. 1. Climate and House Design, (New York: United Nations, 1971).
- (11) Rehabilitation of Transitional Urban Settlements (UNESCO, Committee on Housing, Building and Planning, Report of the Secretary General, e/C.6/1151 (Access 1971).
- (12) Report on Silien and Squatter Problems in Metropolitan Manifa (Manifa, Presidential Coordinating Council for Housing and Urban Development, 1968).
- (13) Reps, W. L. and Simiu, F., editors. Design Siting and Construction of Low-Cost Housing and Community Buildings to Better Withstand Larthquakes and Windstorms, BSS 48 (Washington, D.C.: National Bureau of Standards, 1974). Available from the U.S. Government Printing Office, 13,29-2-48.
  (14) Research Study of the Social Economic Aspects of Low-
- (14) Research Study of the Social Economic Aspects of Low-Cost Housing in the Philippines (Maketi, Rizal Svcip, Giorres Velavo and Co., 1972).
- (15) Rosser, K. C., Housing for the Lowest Income Grou, sthe Calcutta Experience, Ekistics Magazine (Lebruary 1971)
- (16) Self-Help Practices in Housing Selected Case Studies, no. 1734V-15 (New York: United Nations; Department of Leonomic and Social Affairs, n.d.).
- (17) Shubert, C., Hope for Improvement of Slum Squatter Areas (Washington, D.C.; New Spriets of Foundation for Cooperative Housing, August-September 1974).
- (18) "Sites and Services Programs, the Experience and the Potential," Human Settlements (New York: United Nations; International Bank for Reconstruc-

tion and Development, and Center for Housing, Buil fing and Planning, October 1972).

(19) Survey of Housing Conditions in Delacree Pen (Kingston, Jamaica: Continuous Social and Demographic Survey Unit, 1969).

## PLANNING, DESIGN AND CONSTRUCTION TECHNOLOGY

- American Standard Building Code Requirements for Masonry (ANSI A41, 1954, Miscellaneous Publication 211) (Washington, D.C.: National Bureau of Standards, 1954). Available from NTIS, COM. 73-10871.
- Amrhein, J.E., Masonry-Design Manual (Los Angeles, Masonry Institute of America, 1972).
- Amrhein, J.E., Reinforced Masonry Engineering Handbook (Los Angeles Masonry Institute of America, 1972).
- (4) "ANSI Standard A58.1-1972, Chapter 6: Wind Loads," Building Code Requirements for Minimum Design Loads in Buildings and Other Structures (New York: American National Standards Institute, 1972).
- "ANSI A119.1-1974, and Appendix D. ANSI A119.1-1975," Standard for Mobile Hones (New York: American National Standards Institute, 1974).
- (6) Code of Practice for the Design, Fabrication and Erection of Structural Steel Members with Minimum Trackness of 1/8" for Buildings (Manila: Philippine Association of Civil Engineers, January 1968).
- Concrete Masonry Design Manual (Los Angeles Cencrete Association, 1955).
- (8) Design Specifications for Light Metal Plate Connected Wood Trusses (College Park: Truss Plate In-
- Dikkers, R. D., and Saxer, F. L., Hexural Strength of Plain and Reinforced Concrete Masonry Walls (Arlington: National Concrete Masonry Association, 1957).
- (10) Duke, T. J., "All About Timber Piling," AE Concepts in Wood Design No. 8, (March - April 1976)
- (11) Egorup, A. R., Theoretical and Experimental Determination of the Stiffness and Ultimate Load of Timber Trusses, Report Ro2 (Copenhagen, Technical University of Denmark, 1975)
- (12) Engineering Standards, CT 200 (Manila: Philippine Association of Civil Engineers, January 1965)
- (15) Excitations and Foundations, CP 201 (Marila, Philippine Association of Civil Engineers, January 1965).
- (14) Éishburn, C., Effect of Mortur Proporties on Strength of Masonry, NBS Monograph 36 (Washington, D.C. National Bureau of Standards, 1961). Available from NTIS, COM 75-10175.
- (15) Glaumann, M., and Westerberg, V., Klimat och Biggande i Tripikerna, Report 1 Climate and building in the tropics (Stockholm: Royal Technical High School, 1971).
- (16) Housing and Urban Development in the Philippines (USAID) Manula, January 1968).
- (17) Industrial Construction Catalog Life (New York McGraw-Hill Information Systems Company, n.d.)
- (18) Livingston, A.R., Mangotich, E., and Dikkers, R.D., Flexural Strength of Holiono Unif Concrete Masonry Walls, in the Horizontal Span (Arlington, National Concrete Masonry Association, 1958).
- (19) Manual Engineering Practice No. 1 (Association of Structural Engineers of the Philippines) (Overon City: Private Practice of Structural Engineering, 1973).

- (20) Masonry, CP 206 (Manila: Philippine Association of Civil Engineers, January 1965).
- (21) Morgan, J. W., and Beck, R. R., Sheet Metal Roof Failures by Repeated Loading, Technical Report 2 (Australian Department of Powering and Construction, 1975).
- (22) Moss, P. J., and Scrivener, J. C., "Concrete Masonty Wall Panel Tests, New Zealand Concrete Construction," Journal of the New Zealand Portland Cement Association (New Zealand, April 1968).
- (23) Narajanamurty, D., and Mohan, D., The Use of Bamboo and Reeds in Building Construction, no. E.72, IV. 3 (New York, United Nations, n.d.).
- (24) National Design Specifications for Stress-Grade Lumber and Its Fasterings (Washington, D.C.: National Forest Products Association, April 1973).
- (25) National Structural Code for Buildings, (Association of Structural Engineers of the Philippines, Philippine Association of Civil Engineers) (1972).
- (26) NEMA TEK Series (Arlington: National Concrete Masonry Association, n.d.).
- (27) PACE Manual of Engineering Practice No. 1 (Manila: Philippine Association of Civil Engineers, December 1960).
- (28) Pole House Construction (Prepared for Federal Housing Administration) (McLean, American Wood-Preservers Institute, 1976).
- (29) Proceedings of Conference on Unified Building Code (Kingston, Caribbean Council of Engineering Organizations, n.d.).
- (30) Products in Action(Washington, D.C. Timber Engineering Company, n.d.)
- (31) Protecting Mobile Trans. from High Winds, TR-75 (Baltimore, Deby se Civil Preparedness Agency, June 1972).
- (32) Report on Concrete Vasoury Structures-Design and Construction (ACI Committee 531, American Concrete Institute Journal) (May-June, 1970).
- (33) Research Data, (With Commentary in Support of Specification for The National Concrete Masonry Association, n.d.).
- (34) "SAA Loading Code, Part 2-Wind Forces," Australian Standard 1170 (Standards Association of Australia, 1973).
- (35) Sathr, H.S., Housing Construction in Hurricane-Prone Areas, (Prepared for Interregional Seminar on Low-Cost Construction Resistant to Earthquakes and Hurricanes) (Skopje, 1971).
- (36) Salyer, LO., Ball, G.L. III, Usmania, A.M., and Werkmeister, O.W., Development of Low-Cost Roofing From Indigenous Materials in Developing Nations (Monsanto Research Corporation, 1975). Available from N.IIS PM-249 317:948.
- (37) Schneider, R.R., Shear in Concrete Masonry Piers (Los Angeles, Masonry Research of Los Angeles, 1969).
- (38) Servenor, J.C., Static Racking Tests on Concrete Masonry Wallst Austin International Conference on Masonry Structural Systems, 1957)
- (39) Specification for the Design and Construction of Load-Bearing Concrete Masourg(Arlington: National Concrete Masonry Association, r.d.).
- (40) Specification for Portland Coment Philippine Trade Standard 661-01-02 1958, Manula Bureau of Standards (1965)
- (41) Standard Specifications for Construction Lines 1-1-68 (Manula Philippine Standards Association, March 1968).
- (42) Standard Specification for Glazed Ceramic Tiles and Tile Fittings, 1-10-72 (Quezon City, Philippine Standards Association, November 1972).

- (43) Standard Specification for Philippine Cold Praism Steel Wire for Concrete Reinforcment; 1-5-71 (Quezon City: Philippine Standards Association, November 1972).
- (44) Standard Specification for Steel Reinforcement-Bar, 1-7-71:(Quezon City: Philippine Standards Association, November 1975).
- (45) Toennies, H., and Merteu, J.E., Concrete Masonry vocational Training Students' Manual (Arlington: National Concrete Masonry Association, n.d.).
- (46) Uniform Building Code(Whittier: International Conference of Building Officials, 1973).
- (47) Walker, G. R., Minor, J. E., and Marshall, R. D., "The Darwin Cyclone: Valuable Lesson in Structural Design," Civil Engineering-ASCE (December 1975).
- (48) Winfield, A., and Winfield, A., Major Breakthrough in Low-Cost Plastic Housing Using Jute-Reinforced Polyesters: the CARE/Winfield/Bangladesh House (Proceedings, 29th Annual Technical Conference) (Society of Plastics Industry, Inc., 1974).
- (Society of Plastics Industry, Inc., 1974).

  (49) Yokel, F.Y., Dikkers, R.D., "Strength of Load-Bearing Masonry Walls," Journal of the Structural Division (New York: American Society of Civil Engineers, May 1971).
- (50) Yokel, F.Y., Mathey, R.C., and Dikkers, R.D. Compressive Strength of Slender Concrete Mason? Walls, BSS 33(Washington, D.C., National Bureau of Standards, 1970). Available from NTIS, COM 71-00159.
- (51) Yokel, F.Y., Mathey R.G., and Dikkers, R.D., Streight of Masoniv Walls Under Compression and Transverse Louis: FSS 34, (Washington, D.C.: National Eureau of Standards, 1971). Available from NTIS, COM 75-10286.
- (52) Yokel, F.Y., "Stability and Load Capacity of Members with No Tensile Strenath," Journal of the Structural Ditusion (New York: American Society of Civil Engineers, July 1971).

# ANNOUNCEMENT OF NEW PUBLICATIONS IN BUILDING SCIENCE SERIES

Superintendent of Documents, Government Printing Office, Washington, D.C., 20402

Dear Sir:
Please add my name to the announcement but of new publications to buissued in the selbs: National Dureau of Standards Building School Serbo.
Neme
Company
Address
CityStateZip Cedu
(Notifier from key 17-339)

#### NBS TECHNICAL PUBLICATIONS

#### PERIODICALS.

JOURNAL OF RESEARCH reports National Bureau of Standards research and development in physics, mathematics, and chemistry. It is published in two sections, available separately:

#### • Physics and Chemistry (Section A)

Papers of interest primarily to scientists working in these fields. This section covers a broad range of physical and chemical research, with major emphasis on standards of physical measurement, fundamental constants, and properties of matter. Issued six times a year. Annual subscription: Domestic, \$17,60; Foreign, \$21,25.

#### • Mathematical Sciences (Section B)

Studies and compilations designed mainly for the mathematician and theoretical physicist. Topics in mathematical statistics, theory of experiment design, numerical analysis, theoretical physics and chemistry, logical design and programming of computers and computer systems. Short numerical tables, Issued quarterly, Annual subscription: Domestic, \$9.00; Foreign, \$11.25.

DIMENSIONS/NBS (formerly Technical News Bulletin)—This monthly magazine is published to inform scientists, engineers, businessmen, industry, teachers, students, and consumers of the latest advances in science and technology, with primary emphasis on the work at NBS. The magazine highlights and reviews such issues as energy research, fire protection, building technology, metric conversion, pollution abatement, health and safety, and consumer product performance. In addition, it reports the results of Bureau programs in measurement standards and techniques, properties of metter and materials, engineering standards and services, instrumentation, and automatic data processing.

Annual subscription: Domestic, \$12.50, Foreign, \$15.65

#### NONPERIODICALS

Monographs - Major contributions to the technical literature on various subjects related to the Bureau's scientific and technical activities.

Handbooks—Recommended codes of engineering and industrial practice (including safety codes) developed in cooperation with interested industries, professional organizations, and regulatory bodies.

Special Publications - Include proceedings of conferences sponsored by N18, NBS annual reports, and other special publications appropriate to this grouping such as wall charts, pocket cards, and bibliographies.

Applied Mathematics Series "Mathematical tables, manuals, and studies of special interest to physicists, engineers, chemists, biologists, mathematicians, computer programmers, and others engaged in scientific and technical work.

National Standard Reference Data Series Provides quantitative data on the physical and Comical properties of materials, compiled from the world's literature and critically evaluated. Developed under a world-wide program coordinated by NBS, Program under authority of National Standard Data Act (Public Law 90-396).

NOTE: At present the principal publication outlet for these data is the Journal of Physical and Chemical Reference Data (JPCRD) published quarterly for NBS by the American Chemical Society (ACS) and the American Institute of Physics (AIP). Subscriptions, reprints, and supplements available from ACS, 1155 Sixteenth St. N.W., Wash. D. C. 20056.

Bui-ling, Science Series—Disseminates technical information developed at the Rureau on building materials, components, systems, and whole structures. The series presents research results, test methods, and performance criteria related to the structural and environmental functions and the durability and safety characteristics of building elements and systems.

Technical Notes—Studies or reports which are complete in themselves but restrictive in their treatment of a subject. Analogous to monographs but not so comprehensive in scope or definitive in treatment of the subject area. Often serve as a vehicle for final reports of work performed at NBS under the sponsorship of other government agencies.

Voluntary Product Standards.-Developed under procedures published by the Department of Commerce in Part 10. Title 15, of the Code of Federal Regulations. The purpose of the standards is to establish nationally recognized requirements for products, and to provide all concerned interests with a basis for common understanding of the characteristics of the products. NBS administers this program as a supplement to the activities of the private sector standardizing organizations.

Consumer Information Series. Practical information, based on NBS research and experience, covering areas of interest to the consumer. Easily understandable language and illustrations provide useful background knowledge for shopping in today's technological marketplace.

Order above NBS publications from: Superintendent of Documents, Government Printing Office, Washington, D.C. 20(02)

Order following NBS publications—NBSIR's and FIPS from the National Technical Information Services, Springfield, Va. 22161.

Federal Information Processing Standards Publications (FIPS PUBS)—Publications in this series collectively constitute the Federal Information Processing Standards Register. Register serves as the official source of information in the Federal Government regarding standards issued by NRS pursuant to the Federal Property and Administrative Services Act of 1949 as amended, Public Law 89-306 (79 Stat. 1127), and as implemented by Executive Order 11717 (38 FR 12015, dated May 11, 1973) and Part 6 of Title 15 CFR (Code of Federal Regulations).

NBS Interagency Reports (NBSIR)—A special series of interim or final reports on work performed by NBS for outside sponsors (both government and non-government). In general, initial distribution is handled by the sponsor; public distribution is by the National Technical Information Services (Springfield, Va. 22161) in paper copy or microfiche form.

#### BIBLIOGRAPHIC SUBSCRIPTION SERVICES

The following current-awareness and literature-survey bibliographies are issued periodically by the Bureau: Cryogenic Data Center Current Awareness Scrvice, A literature survey issued biweekly. Annual subscription: Domestic, \$25(0); Foreign, \$30(0).

Liquified Natural Gas. A literature survey issued quarterly. Annual subscription: \$20.00.

Superconducting Devices and Materials, A literature survey issued quarterly. Annual subscription: \$30.60. Send subscription orders and remittances for the preceding bibliographic services to National Bureau of Standards, Cryogenic Data Center (275.02) Boulder, Colorado 80302.

#### U.S. DEPARTMENT OF COMMERCE National Sureau of Standards Washington, 0.0, 20234

OFFICIAL BUSINESS

Penalty for Private Use, \$300

POSTAGE AND FEET FAIC U.S. DEPARTMENT OF COMMERCE COMMESTS



SPECIAL FOURTH-CLASS BATE BOOK

699.83

M3

ศูนย์บริการเอกสารการวิจัยฯ



BE20926

Building to resist the